


# Balboa Spa Control Stereo Components

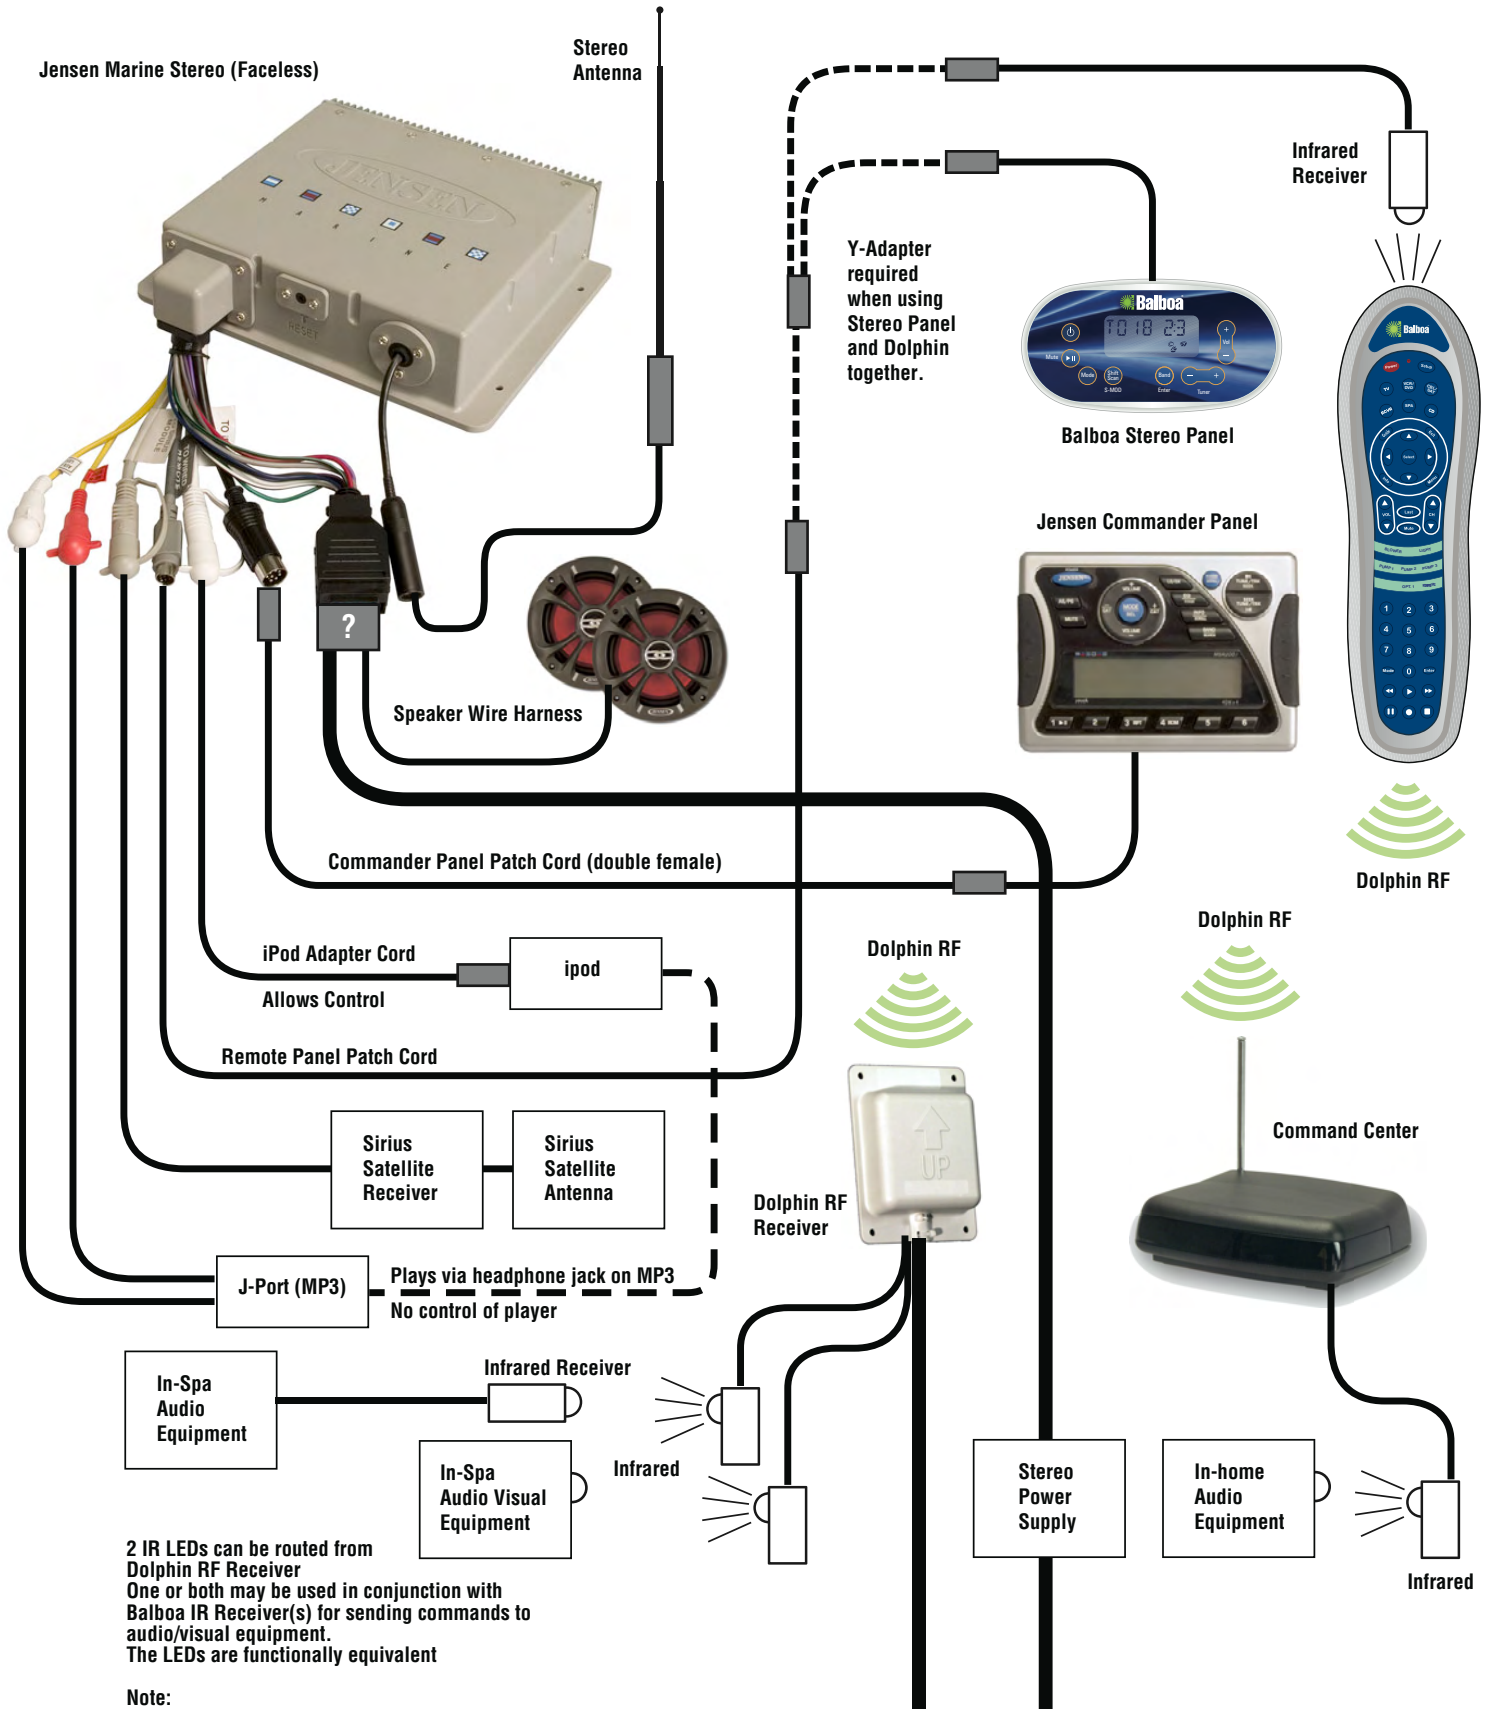

Y-Adapter required when using Stereo Panel and Dolphin together.

2 IR LEDs can be routed from Dolphin RF Receiver  
 One or both may be used in conjunction with Balboa IR Receiver(s) for sending commands to audio/visual equipment.  
 The LEDs are functionally equivalent

**Note:**  
 The Y-Adapter (shown above) must also be used if the Stereo panel and Jensen stereo are used with the Dolphin RF Receiver.

To Spa Control System

